


TERMINAL BOX DETAILS

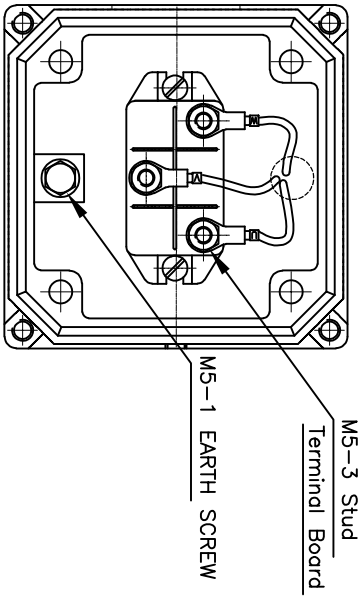

ALL DIMENSIONS ARE IN mm

GENERAL TOLERANCES

LINEAR DIMENSIONS (MACHINING)	GENERAL TOLERANCES				
	ABOVE 0	30	100	300	1000
UP TO	30	100	300	1000	
TOL	±0.2	±0.3	±0.5	±0.8	

ANGLES ± 1/2°

NAME PLATE DETAILS (S12615:2018)		PREPARED	K.SP	17-06-2024
Marking	CE	CHECKED	ASP	17-06-2024
Frame	LE 71	APPROVED	K.K.N	17-06-2024
Duty	S1	SCALE	NTS	
Class of Insulation	F	QUANTITY	1 No	
Frequency, Hz	50±5%	MATERIAL	-	
Pole	4	ROUGH FINISHED		
Connection	STAR			
Output in kW	0.37			
Voltage in Volts	415±10%			
F.L.Current in Amps	1.4			
Speed in RPM	1380			
% Efficiency	77.3(IE3)			
Brg.(DE)	6203 2RS C3			
Brg.(NDE)	6203 2RS C3			
Power Factor	0.73			
Protection	IP55			

LAKSHMI ELECTRICAL DRIVES PRIVATE LIMITED
COMBATORE - 641 004



G.A DRAWING
0.37KW, 4 POLE, IE3

MODEL	LE 71	DRG.No	LEH07145002	REV.	NO	00
ALTERATIONS						
SIGN/ DATE						
DCR. NO						
ZONE						
WEIGHT IN Kg.						